VALPAR MICRO MATIC

XTRA-FLEXMASTER

NEW!

DESCRIPTION

Similar to Superflexmaster tubing but even more flexible with all the same performance benefits. Best suited for use where regular flexing is likely to occur.

FEATURES & BENEFITS:

- Excellant flexibility – even better than Superflexmaster
- Ultra-smooth inner layer
- Taint free
- Improved hygiene – Reduced line cleaning over MDP

SPECIFICATION HIGHLIGHTS:

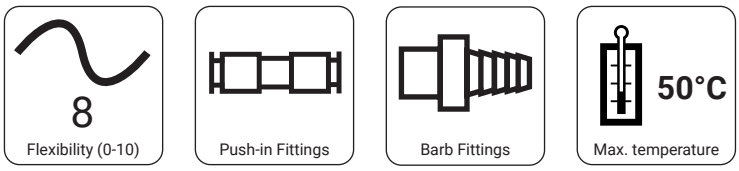

APPLICATIONS:

TECHNICAL SPECIFICATIONS:

Item	Ø, Inner/outer in mm (inch)	Safe operating pressure at 20°C	Min. bend radius at 20°C	Coil length
EEN5x1001	5.0 X 10.0 (0.20 x 0.394)	10,3 bar	28 mm	100 m
EEN6x9.501	6.0 X 9.5 (0.235 x 0.375)	7 bar	33 mm	100 m
EEN26537501	6.7 x 9.5 (0.265 x 0.375)	5,4 bar	50 mm	100 m
EEN7 x 1201	7.0 X 12.0 (0.275 x 0.472)	8,2 bar	34 mm	100 m

TUBING LAYERS: