# PRO-LINE™ 69" - 3 KEG



- Designed by beer-industry experts for performance and value.
- Front air intake and exhaust.











Adjustable Digital Thermostat! Easy to read display

RIGHT-SIDE COMPRESSOR CONFIGURATION AVAILABLE. CONTACT OUR SALES TEAM TO LEARN MORE.





Listed by Edison Testing Laboratories. Conforms to UL & NSF Standards.

www.micromatic.com • 1 (866) 327-4159

PRO-LINE™ 69" - 3 KEG

Part No.	Door Type		Door Type	Finish	Doors	Shipping Weight
☐ MBB68-E	Solid	☐ MBB68G-E	Glass	Black	2	163 kg
						359 lbs
☐ MBB68S-E	Solid	☐ MBB68GS-E	Glass	Stainless Steel	2	163 kg
						359 lbs


# **Operating Performance**

Keg Capacity of 1/2 Kegs	3
Cubic Feet (liters)	28 (793)
Shelves, Flat - Included	2
Shelves, Dividers - Included	2
Cans 12 oz (355ml)	852
Approval	ETL Listed
Compressor HP	1/3

Running Amps	3.0
Voltage	115/60/1
Plug Type	NEMA-5-15P
Cord Length	8'
Refrigerant	R290
Charge oz	4.9
Working High/Low Pressure	300 psig / 150 psig

Exterior	All Models: 18 gauge 201 grade stainless steel (s/s) top, 22 gauge solid doors, 24 gauge steel front, sides and back. Black Models: Front, sides, back and doors black vinyl over steel. S/S Models: Front, sides, back and doors are s/s.
Interior	20 gauge stainless steel floor and walls, rugged false floor, reinforced frame
Ventilation	Front air intake and exhaust
Plumbing	Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor
Accessories	Casters or 6" fixed legs (order separately)

## **Dimensions**

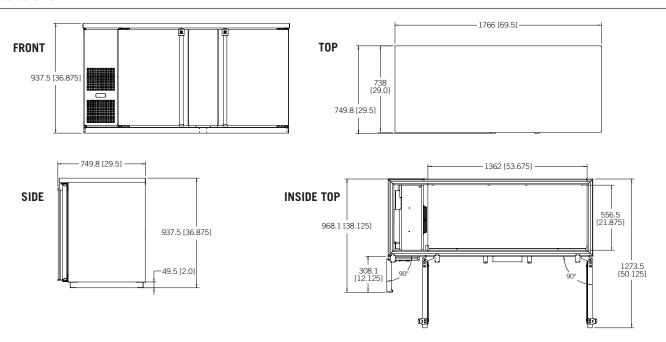



Toll-Free: 1-866-327-4159 www.micromatic.com

### West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

### Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557

### Southeast

2386 Simon Ct. Brooksville, FL 34604 Tel. (352) 799-6331

### **Northeast**

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466