
DUAL-TEMPERATURE WINE DISPENSER



PRO-LINE™ WINE 25" - 4 KEG / 3 FAUCET

- Designed by wine-industry experts for performance and value.
- Two dedicated temperature zones for optimal wine dispensing.
- Sommelier wine font with 3 faucets.
- Commercial grade construction built to last.







MDD23W-E-D Black





Listed by Edison Testing Laboratories. Conforms to UL & NSF Standards.

Tap handles not included Tapping hardware not included

www.micromatic.com • 1 (866) 327-4159

PRO-LINE™ WINE 25" - 4 KEG

Job Number: Location:






Operating Performance

Capacity of 20 Liter Kegs	4 (2 per zone)
Color-coded Digital Thermostats	2 (Blue LED-Whites & Red LED-Reds)
Temperature Range - Whites	42-48° F (5.5 - 8.8° C)
Temperature Range - Reds	55-65° F (12.7 - 18.3° C)
Approval	ETL Listed
Running Amps	1.5

Compressor HP	1/10
Voltage	115/60/1
Plug Type	NEMA-5-15P
Cord Length	8'
Refrigerant	R290
Charge oz	2.8

Exterior	18 gauge stainless steel top, 22 gauge solid doors, 24 gauge steel front, sides and back.
Interior	20 gauge stainless steel floor, reinforced frame, 24 gauge galvanized walls.
Ventilation	Back ventilated.
Plumbing	Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 1-1/2" top, walls and floor.
Mobility	Casters are standard and not removable.

Dimensions

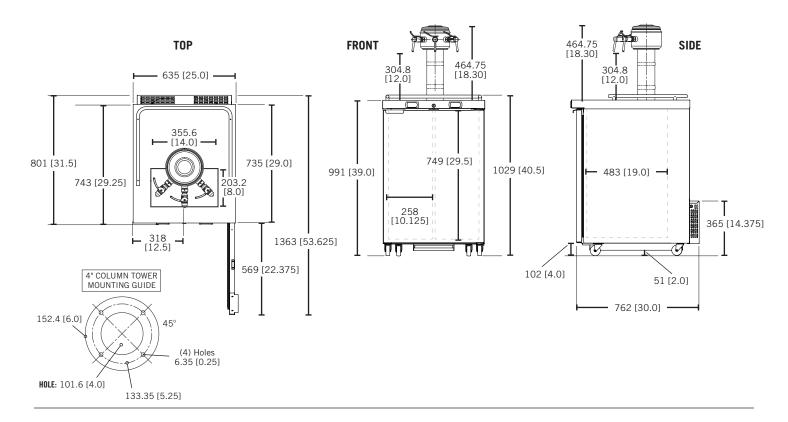



Toll-Free: 1-866-327-4159 www.micromatic.com

West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557

Southeast

2386 Simon Ct. Brooksville, FL 34604 Tel. (352) 799-6331

Northeast

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466